



ART-6

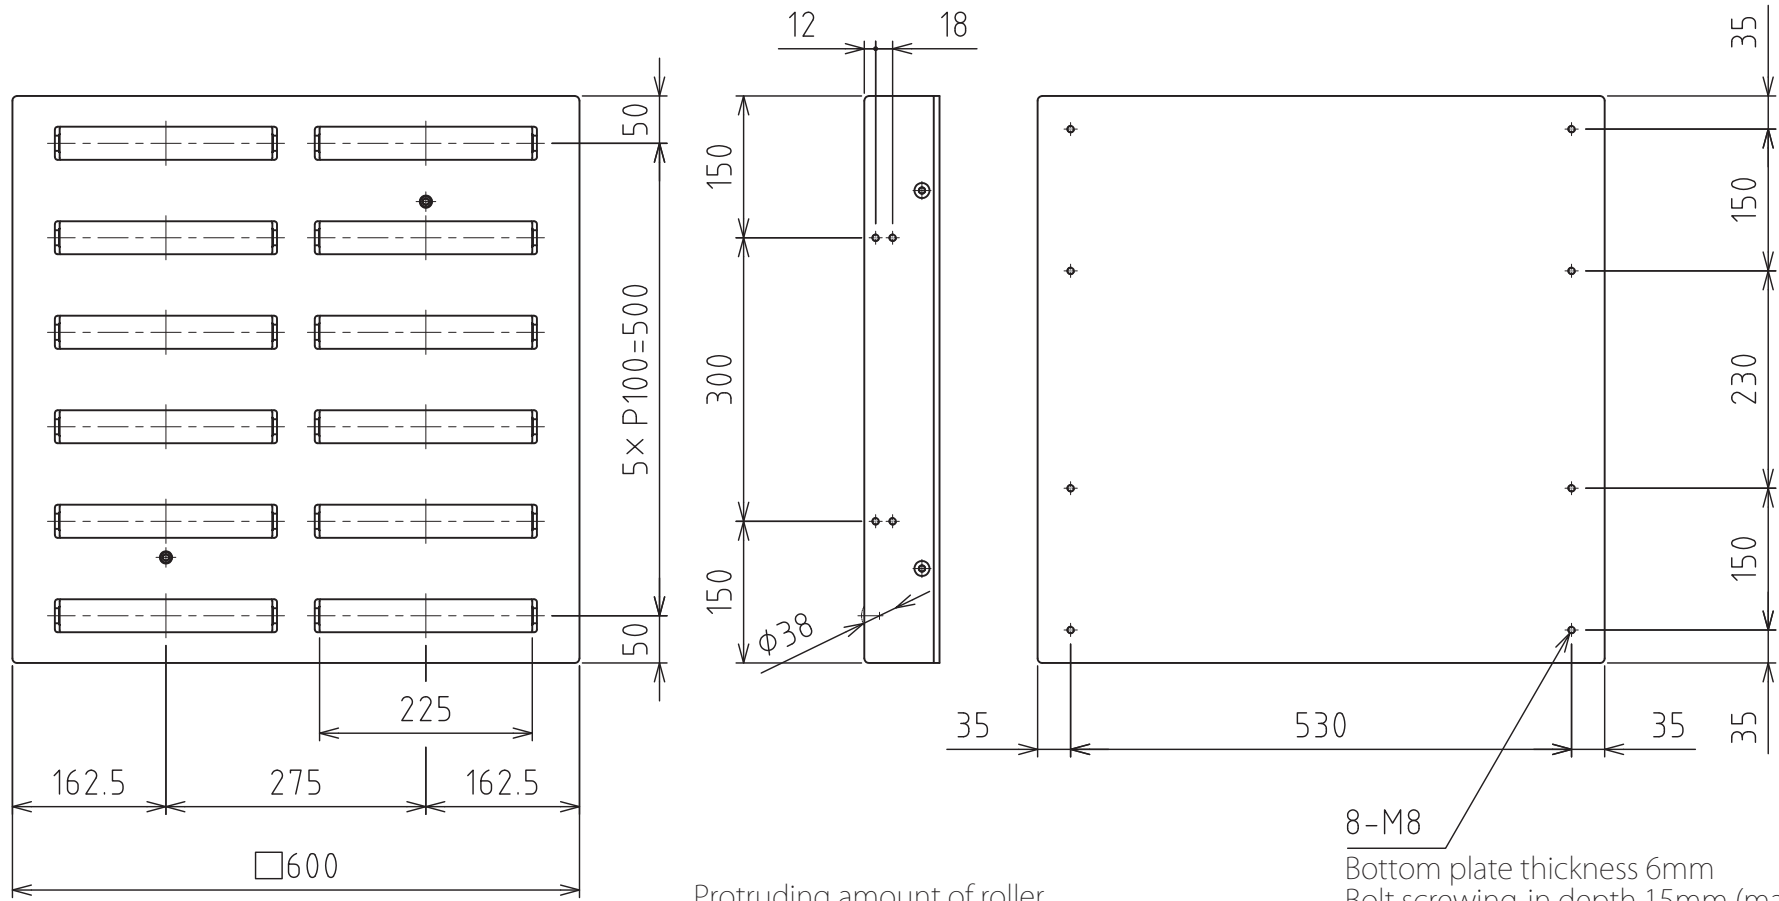

Protruding amount of roller when raised

8-M8
Bottom plate thickness 6mm
Bolt screwing-in depth 15mm (max.)

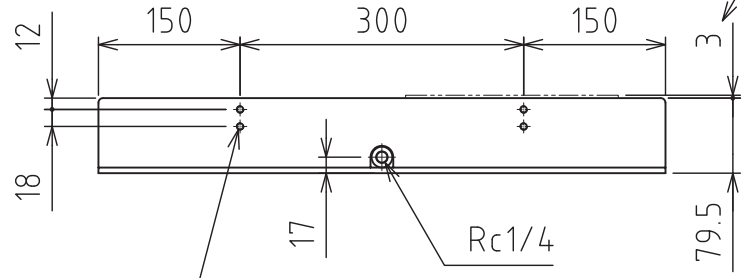

16-M8
(for mounting the fixed guide and removable guide)

※The guide can be mounted on four sides respectively

Roller : $\phi 38$ x 6pcs. x 2rows
Load capacity : 500kg
Recommended air pressure : 0.5MPa (5.1kgf/cm²)
Weight : 69kg

