


# S-3HK-UPE static conductive-CR

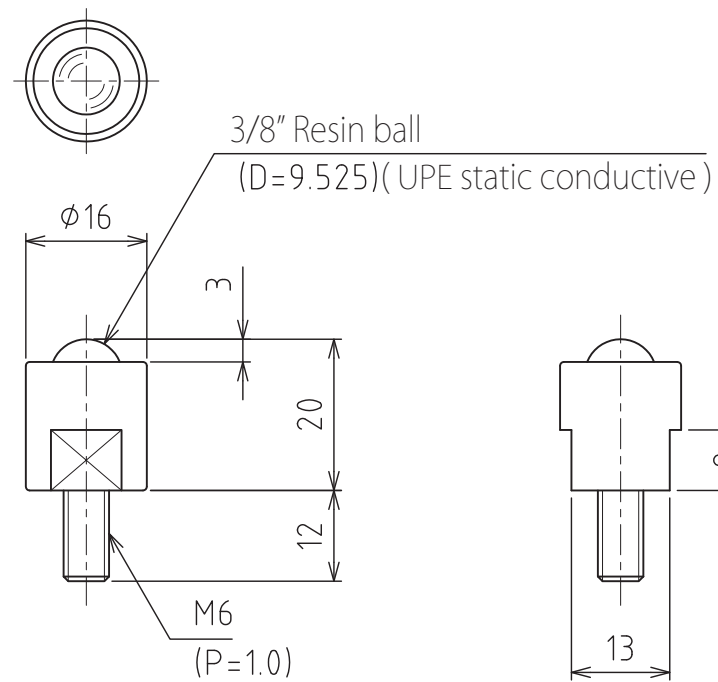

Clean packaging

Recommended load : 9.8N(1kgf)  
Weight : 23g