



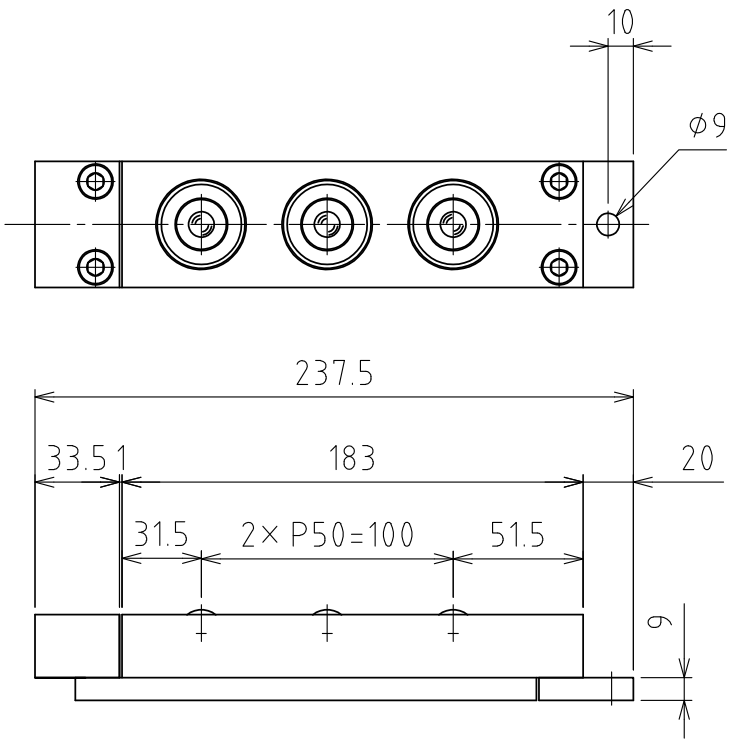

A-direction
→

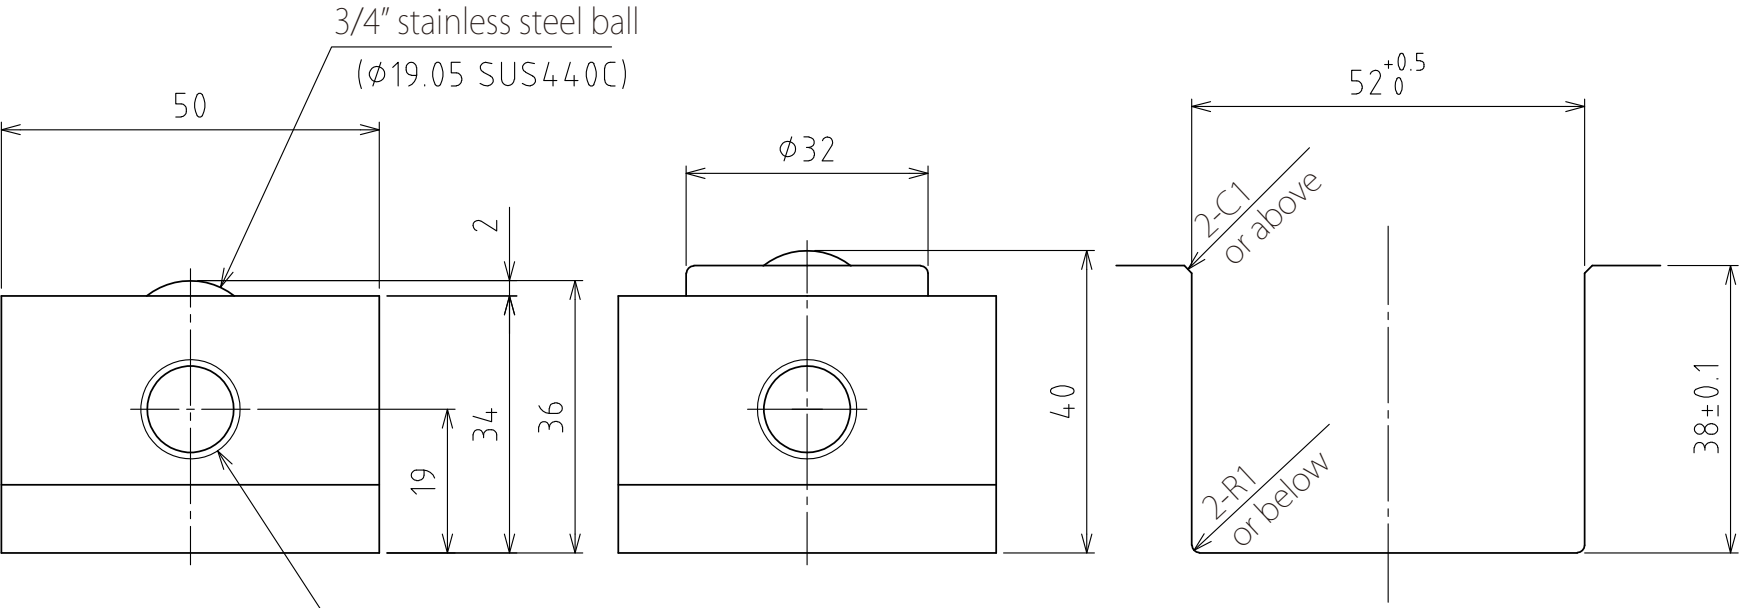

View A

Rising
(stroke 4mm)

(Scale 1:1)

Recommended groove dimensions

spec

Series		AFU-5036M series	
Freebear		3pcs	
Material	Ball	SUS440C	
	Ball seat	SUS440C	
	Body	Steel (Electroless nickel-plating)	
Weight		2.4kg	

Capacity	Air pressure [MPa(kgf/cm ²)]	Load capacity (Unit) [kN(kgf)]	Load capacity (One freebear) [kN(kgf)]
	0.3 (3.1)	0.59(59.7)	0.20(19.9)
	0.4 (4.1)	0.72(73.4)	0.24(24.5)
	0.5 (5.1)	0.93(94.8)	0.31(31.6)
	0.6 (6.1)	1.17(119.3)	0.39(39.8)

設計 DESIGNED BY	古内	2021/07/28	名称 TITLE Pneumatically Actuated freebear unit AFU-5036M-3
製図 DRAWN BY	古内	2021/07/28	
検図 CHECKED BY	技術部 21.11.18 坂根	承認 APPROVED BY 技術部 21.11.26 花村	
尺度 SCALE	1:3	サイズ SIZE	
第三角法			変更回数 REV.MARK
図面番号 DRAWING NO.			SD-01284-F01

